


SU SERIES

W6-1139SIF

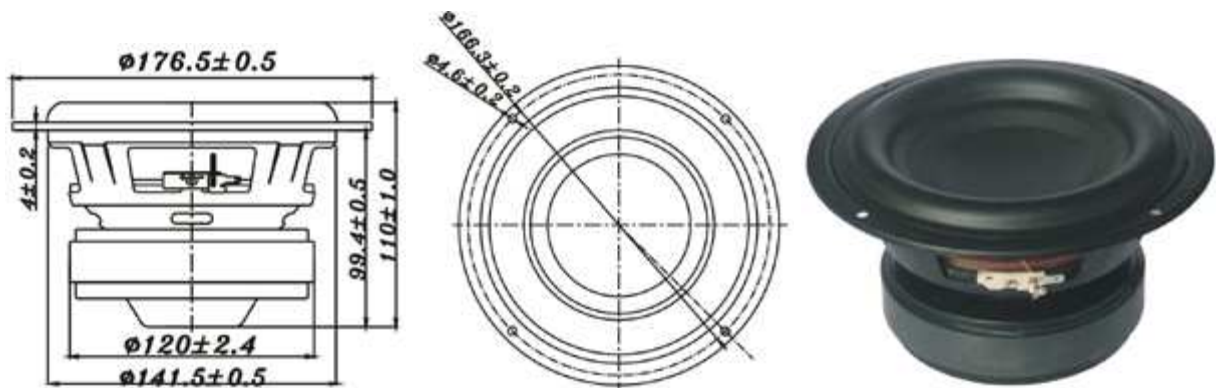

- LONG-THROW HIGH-POWER LOADING DESIGN (X-max=11.5mm)
- PAPER CONE WITH BIG ROLL, SPECIAL LESS DAMPING, WIDE RANGE TEMPERATURE RUBBER SURROUND
- VENTED POLE PIECE
- STAMPING STEEL BASKET
- SUITABLE FOR SUBWOOFER APPLICATION

6.5" PAPER SUBWOOFER



DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	4
DCR IMPEDANCE	3.6
SENSITIVITY 1W/1m	83 dB
FREQUENCY RESPONSE	35-800 Hz
FREE AIR RESONANCE	35 Hz
VOICE COIL DIAMETER	38.5 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	50 W
MAXIMUM POWER INPUT	100 W
FORCE FACTOR, BL	8.47 T
MAGNET WEIGHT (29.2 oz)	826 g
MOVING MASS	39.91 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	598.98 μMN
EFFEC.PISTON AREA	0.0140 M ²
Levc	0.47 m
Zo	39 oh
X-max	11.5 mm
Vas	11.78 Lit
Qts	0.4
Qms	2.6
Qes	0.4



VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com

CLOSE